

Buchsen
Sockets




Type 221




Type 222

Buchsen
Sockets

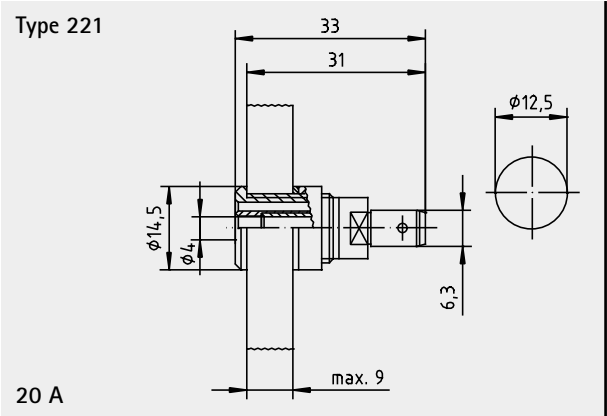

- schwarz | black 8772220100
- rot | red 87722210200
- blau | blue 87722210300
- gelb-grün | yellow-green 87722210900

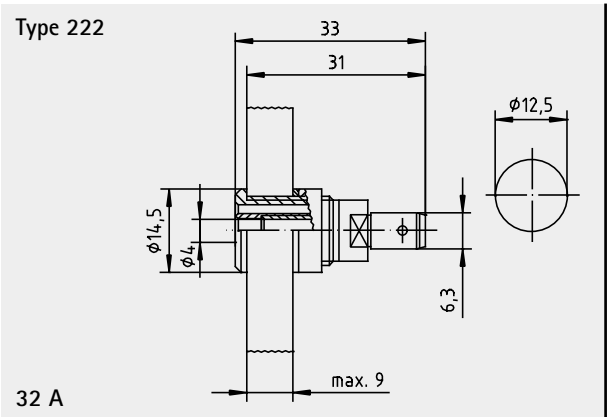

- schwarz | black 8772220100
- rot | red 87722220200
- blau | blue 87722220300
- gelb-grün | yellow-green 87722220900

	Type 221	Type 222
Bemessungsstrom design current	20 A	32 A
Metallteile metal parts	Messing, verzinnt brass, tin-plated	Messing, verzinnt brass, tin-plated
Isolierteile insulated parts	Polyamid polyamide	Polyamid polyamide
Temperaturfestigkeit temperature stability	80 °C	80 °C
Arbeitsspannung working voltage	1600 V	1600 V
Isolationskoordination insulation co-ordination	6 kV/1	6 kV/1
Bemessungs-Stoßspannung design impact potential	6 kV	6 kV
Prüfspannung testing voltage	3200 V	3200 V
max. leitende Gehäusewandstärke (SG) conducting wall thickness max. (SG)	10 mm	10 mm
Kriechstrecke (SK max.) creep distance (SK max.)	18.8 mm	18.8 mm
Isoliermaterial insulating material	II	II
Isolationswiderstand insulation resistance	>10 ⁹ Ω	>10 ⁹ Ω
Durchgangswiderstand pass-through resistance	0.8 m Ω	0.8 m Ω
Anzugsdrehmoment starting torque		1.2 Nm